

JCUK系列


1 适用范围

JCUK系列适用于额定电压至690V(660V)额定导线截面积至150mm²的电路中作导线连接之用。
符合标准：GB/T 14048.7、IEC 60947-7-1。



JCUK-2.5N	JCUK-35N	JCUK-50H	JCUK-150H
JCUK-95H	JCUK-5N	JCUK-6N	JCUK-10RD
JCUK-3N	JCUK/DK4	JCUK-5RD	JCUK/DK5
JCUK-5JD	JCUK-10JD	JCUK-16JD	JCUK-35JD
JCUK/S	JCUK-10N	JCUK-16N	

2 外形及安装尺寸

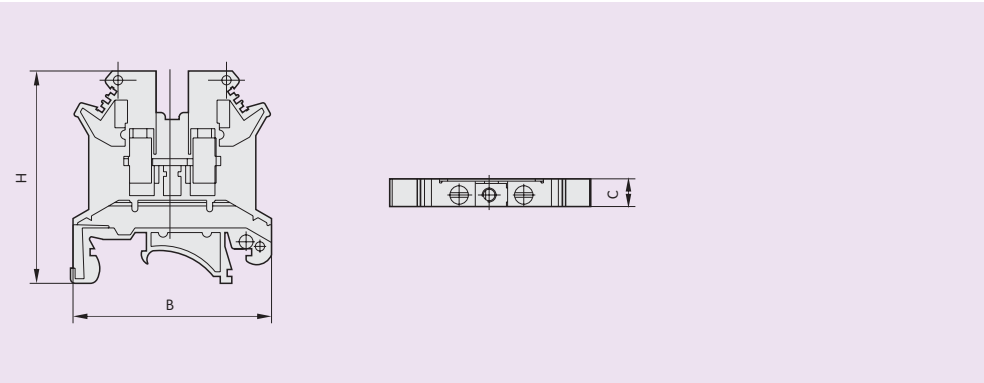

序号	产品型号	外形尺寸(mm)			安装轨型式	备注
		B	C	H		
1	JCUK-2.5N	43	6.2	41	TH35/G32	
2	JCUK-3N	43	5.2	46	TH35/G32	
3	JCUK-5N	43	6.3	46	TH35/G32	
4	JCUK-6N	43	8.2	46.5	TH35/G32	
5	JCUK-10N	43	10.2	46.5	TH35/G32	
6	JCUK-16N	43.5	12.2	51.5	TH35/G32	
7	JCUK-35N	51	15.5	61.5	TH35/G32	
8	JCUK-50H	76.5	20.5	76.5	TH35/G32	
9	JCUK-95H	89	25.5	90.5	TH35/G32	
10	JCUK-150H	106	31.3	112.5	TH35/G32	
11	JCUK/S	73	8.3	51	TH35/G32	
13	JCUK/DK5	57	8.7	61.5	TH35/G32	
14	JCUK/DK4	64	6.2	46.5	TH35/G32	
15	JCUK-5JD	43	6.5	45.5	TH35/G32	
16	JCUK-10JD	43	10.5	45.5	TH35/G32	
17	JCUK-16JD	43	12.4	52.5	TH35/G32	
18	JCUK-35JD	51	15.4	61.5	TH35/G32	
19	JCUK-5RD	73	8.5	57	TH35/G32	配5×25芯
20	JCUK-10RD	63	12.5	56.5	TH35/G32	配5×20芯
21	E/UK(固定件)				TH35/G32	
22	JCUK-BJ(标记号)	1~10				
23	D/UK4/10(3N-16N挡板, JCUK-2.5N挡板)					

3 订货须知

- 3.1 订货时应注明产品的型号、接线横截面积或电流、类别、数量。
- 3.2 常规的接线端子由10片组装成1条。
- 3.3 对于有其它特殊要求应注明。
- 3.4 订货示例：JCUK-2.5N/10 5条
表示订货型号为JCUK，接线横截面积为2.5mm²，类别为普通型，总共数量为5条。

